


Handshowers

All measurements are nominal

Zento Single Spray Handshower Set

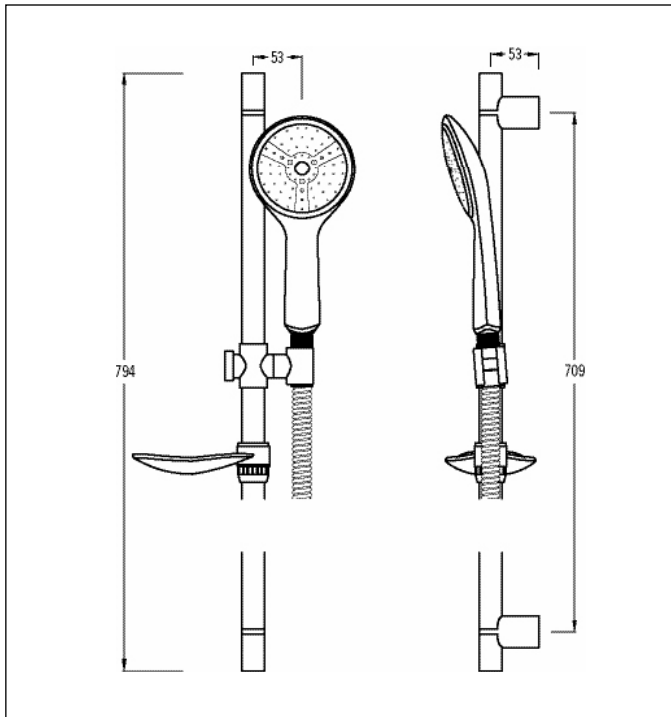

Suitable all pressures

Recommended Pressure
Operational Range:
Minimum: 50 kPa
Recommended: 600 kPa
Never to Exceed: 1000 kPa
Maximum Operating
Temperature: 70°C

Code:	ZN SSHSS
Finish:	Chrome
Rail Construction:	All metal
Slider:	Twist to lock
Size:	Dia. 25mm
Length:	794mm
Spray Hose Construction:	Metal wide bore
Internal Diameter:	9mm
Length:	1.5m
End Posts:	22 x 35mm
Head:	Single spray - rub clean Dia. 120mm
Spray pattern at head:	Dia. 90mm
Spray pattern at 1/2 metre:	Dia. 190mm
Minimum flow required:	3 l/min
Spray function:	Standard spray
Wall elbow:	Luxury
Soap dish:	Metalised ABS
WELS:	Mains pressure 3 Star
	Flow rates 9 l/min with P.C.W. fitted
	Low/unequal 3 Star
	Max flow @ 35kPa 8.2 l/min

Aquatika Warranty

Aquatika NZ Limited offer, from the date of purchase, a 2 year warranty on handshowers, a 5 year warranty on tapware and accessories and a lifetime warranty on stainless steel sinks.

Aquatika NZ Limited warrants that only high quality workmanship and materials have been employed in the manufacture of its tapware, accessories and stainless steel products. If any faulty workmanship or materials is proven during the warranty period, Aquatika NZ Limited will at its own cost repair, or at its option replace, the faulty product.

The guarantee is non-transferable and proof of purchase is required.

The use of spray or abrasive cleaners of any kind will void the warranty. (Tapware should only be cleaned with a mild detergent and a soft damp cloth).

Failure to use an in-line strainer or filter on lines to tapware incorporating a ceramic cartridge or ceramic disc mechanism may also void the warranty.

Every effort has been made to show the products as they will be sold, however, all models and specifications are subject to change without notice.



Aquatika NZ Limited

9 Saunders Place,

Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatika.co.nz