


## 4 Hole Bath Set

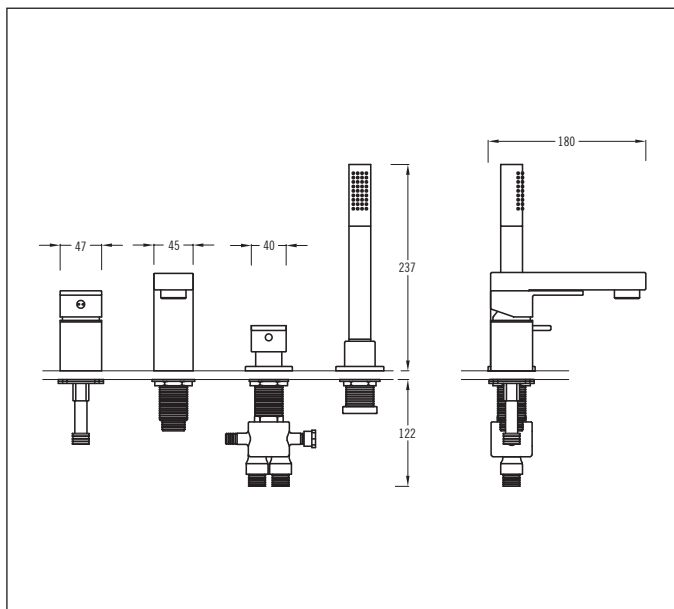

### Mains pressure only

Recommended Pressure

Operational Range:

Minimum: 150 kPa

Recommended: 600 kPa

Never to Exceed: 1000 kPa

Maximum Operating

Temperature: 70°C

|   |   |                |  |
|---|---|----------------|--|
| Code:   | KD BSET4  |                |  |
| Finish:   | Chrome  |                |  |
| Hobmount for Handshower                                     |   |                |  |
| Mounting:   | Threaded tube and brass back nut<br>27 x 1.5 mm |                |  |
| Hole:   | 27 to 36 mm                                     |                |  |
| Handpiece or Spray Head:                                    |   |                |  |
| Length:   | 200 mm  |                |  |
| Diameter:   | 24 mm   |                |  |
| Mixer:  |   |                |  |
| Inlets Hot/Cold:  | Flexis:   | M10 x 1/2" BSP |  |
|   | Length:   | 400mm          |  |
| Mounting:   | M14 x 1 mm                                      |                |  |
|   | Threaded tube and brass back nut with C washer  |                |  |
| Hole:   | 30 to 36 mm                                     |                |  |
| Cartridge:  | Kerox 40K                                       | Flat base      |  |
| Spout:  |   |                |  |
| Mounting:   | Threaded tube and brass back nut 27 x 1.5 mm    |                |  |
| Hole:   | 27 to 34 mm                                     |                |  |
| Water outlet:   | Large aerator                                   |                |  |
| Reach:  | 140 mm  |                |  |
| Height:   | 82 mm   |                |  |
| Divertor:   |   |                |  |
| Mounting:   | Threaded body and brass back nut<br>27 x 1.5 mm |                |  |
| Hole:   | 27 to 36 mm                                     |                |  |
| 4 Detented positions @ 90°   OFF → SPOUT → OFF → HANDSHOWER |   |                |  |
| Pull out hose:  | Metal narrow bore 1.5 m length                  |                |  |
| WELS:   |   |                |  |
|   | Mains pressure                                  | 3 Star         |  |
|   | Flow rates                                      | 9 l/min        |  |

**Special tool required to remove cartridge**

### Aquatica Warranty

Aquatica NZ Limited offer, from the date of purchase, a 2 year warranty on handshowers, a 5 year warranty on tapware and accessories and a lifetime warranty on stainless steel sinks.

Aquatica NZ Limited warrants that only high quality workmanship and materials have been employed in the manufacture of its tapware, accessories and stainless steel products. If any faulty workmanship or materials are proven during the warranty period, Aquatica NZ Limited will at its own cost repair, or at its option, replace the faulty product.


Our liability will not extend to damage caused by reasonably foreseeable loss such as inappropriate materials in a wet area, ie. floating wooden floors.

The guarantee is non-transferable and proof of purchase is required.

The use of spray or abrasive cleaners of any kind will void the warranty. (Tapware should only be cleaned with a mild detergent and soft damp cloth).

Failure to use an in-line strainer or filter on lines to tapware incorporating a ceramic cartridge or ceramic disc mechanism may also void the warranty.

Every effort has been made to show the products as they will be sold, however, all models and specifications are subject to change without notice.



### Aquatica NZ Limited

9 Saunders Place,  
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: [info@aquatica.co.nz](mailto:info@aquatica.co.nz)

or visit our website:

[www.aquatica.co.nz](http://www.aquatica.co.nz)