


Sink Mixer Pull-Out Spray

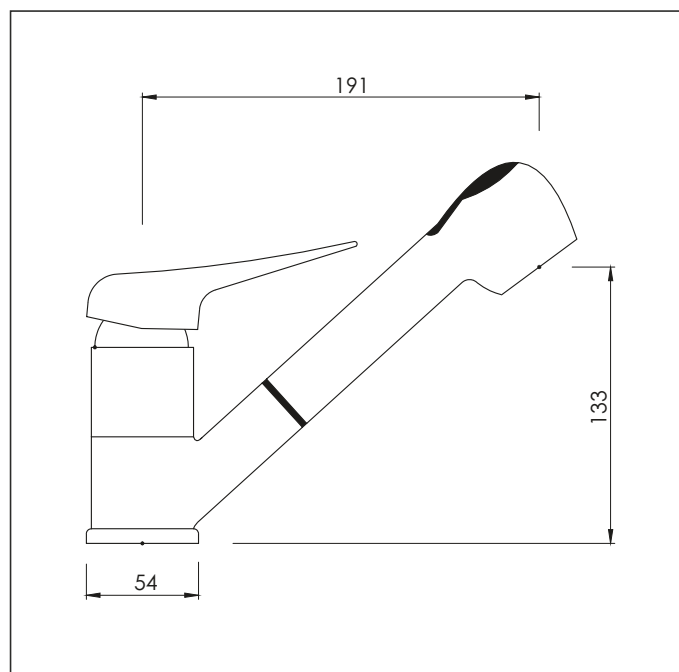

Code: SO SMPS

Finish: Chrome

Spout: Swivel 90°

Water outlet: Spray or aerated flow

Stainless Steel Braided Inlet Hoses:

Hot: Size: M10 x 1/2" BSP
Length: 400 mm

Cold: Size: M10 x 1/2" BSP
Length: 400 mm

Metal Dress Ring supplied with O-ring seal

Mounting Hardware:

Stud: 2X 6 mm

Nut: 9 mm A/F
Horseshoe washer

Installation Hole Diameter (with Dress Ring) :

Minimum: 38 mm

Maximum: 44 mm

Cartridge: Kerox 40K Flat base

Flow control: PCW 9.0 ltr

Mains pressure only

Recommended Operational

Pressure Range: 150 - 600 kPa

Never to Exceed: 1000 kPa

Maximum Operating

Temperature: 80°C

Aquatica Warranty

Aquatica NZ Limited offer the following warranty periods on its range of tapware from the date of purchase.

Residential Use

- Tapware - 5 year warranty
- Handshowers, Shower Roses – 2 year warranty
- Pull-out Sprays and spray heads on Sink Mixer Coils – 2 year warranty
- Commercial tapware – 2 year warranty

Commercial Use

- Tapware - 1 year warranty
- Handshowers, Shower Roses – 1 year warranty
- Pull-out Sprays and spray heads on Sink Mixer Coils – 1 year warranty

Only high quality workmanship and materials have been used in the manufacture of Aquatica's tapware. If any workmanship or material is proven faulty during the warranty period, Aquatica NZ Limited will, at its own cost or option, repair or replace the faulty product.

The warranty is transferable but the original proof of purchase from an authorised Aquatica distributor is required for all claims.

Aquatica's liability will not extend to damage caused by reasonably foreseeable loss such as inappropriate materials in a wet area ie. floating wooden floors.

Waterlines to tapware incorporating a ceramic cartridge or ceramic disc mechanism should have an inline strainer or filter fitted. Absence of these may void the warranty.

Any suspected defect must be notified to Aquatica as soon as possible after discovery. All repair work must be performed by a plumber who has received authorisation from Aquatica prior to proceeding with the work. Aquatica may immediately authorise repair work to be undertaken, however, this is not necessarily acceptance of liability.

Aquatica guarantee that the tapware will be able to handle temperatures up to a maximum of 70°C.

Water pressure up to 1000 kPa is the maximum limit for the tapware. Above this the warranty will become void.

Serial numbers or tags should not be removed from the products as they are essential in establishing warranty.

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2016

Handy Tip 1: Pull-out hose and counterweight must be free of interference under bench. (If flexi hoses are repeatedly hit, they will fail).

Handy Tip 2: Threaded base ring must be adjusted for correct swivel tension. (i.e. If it is too loose the spout will swing excessively; if excessively tight, it can result in damage to mixer).
Not recommended for commercial installations.

Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation.

