


Prestigio



## Basin Mixer 35

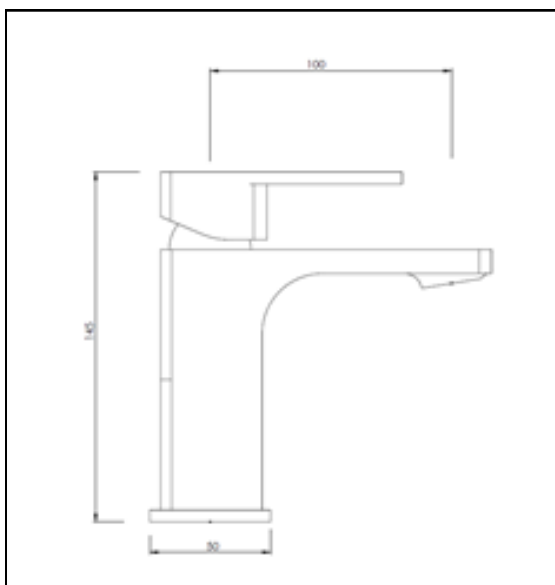

### Mains pressure only

Recommended Pressure  
Operational Range:  
Minimum: 150 kPa  
Recommended: 600 kPa  
Never to Exceed: 1000 kPa  
Maximum Operating  
Temperature: 70°C

Code: PR BASM35  
Finish: Chrome  
Spout: Fixed  
Water Outlet: Cache style aerator

### Stainless Steel Inlet Hoses:

Hot:	I/D: 5.5mm	Size:	M10 x 1/2" BSP
		Length:	300mm
Cold:	I/D: 5.5mm	Size:	M10 x 1/2" BSP
		Length:	300mm
Mounting Hardware:	Stud:	2 x 6mm	
	Nut:	10mm A/F	
	Horseshoe washer		
Installation Hole Diameter:	Minimum:	28mm	
	Maximum:	38mm	
Cartridge:	35mm Kerox	Open housing raised base	
WELS:	Mains pressure	4 Star	
	Flow rate	7.5 l/min	



### Aquatica Warranty

Aquatica NZ Limited offer, from the date of purchase, a 2 year warranty on handshowers, a 5 year warranty on tapware and accessories and a lifetime warranty on stainless steel sinks.

Aquatica NZ Limited warrants that only high quality workmanship and materials have been employed in the manufacture of its tapware, accessories and stainless steel products. If any faulty workmanship or materials are proven during the warranty period, Aquatica NZ Limited will at its own cost repair, or at its option, replace the faulty product.

The guarantee is non-transferable and proof of purchase is required.

The use of spray or abrasive cleaners of any kind will void the warranty. (Tapware should only be cleaned with a mild detergent and a soft damp cloth).

Failure to use an in-line strainer or filter on lines to tapware incorporating a ceramic cartridge or ceramic disc mechanism may also void the warranty.

Every effort has been made to show the products as they will be sold, however, all models and specifications are subject to change without notice.

Aquatica NZ Limited  
9 Saunders Place  
P O Box 19146  
Avondale, Auckland  
Tel: 09 828 2068  
Fax: 09 828 2069  
Email: [info@aquatica.co.nz](mailto:info@aquatica.co.nz)  
Or visit our website  
[www.aquatica.co.nz](http://www.aquatica.co.nz)