


Sigma

Exposed Bath Mixer with Divertor and Handshower

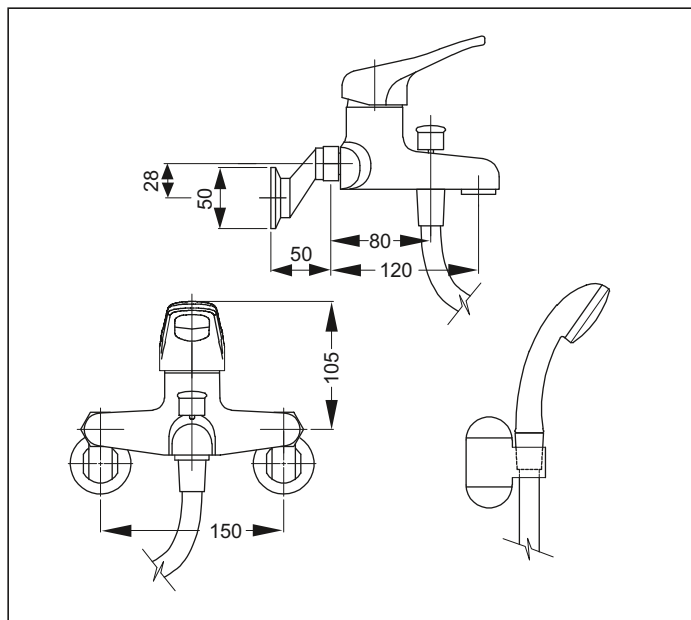

Code: SG XBM15 15mm eccentrics

Code: SG XBM20 20mm eccentrics

Finish: Chrome

Ideal for mains pressure

Water Director and Wall Bracket supplied

Handshower Hose: Internal Diameter: 9.5mm
Length: 1.5 metre

Eccentrics: Standard: +/- 54mm
Special: +/- 115mm (available on request)
Eccentric height (reach from wall): Standard: 50mm
Special: 80mm

Connection Nut to Eccentric: 29mm A/F

Installation Hole Diameter - 15mm Tap: Minimum: 22mm
Maximum: 45mm

Installation Hole Diameter - 20mm Tap: Minimum: 26mm
Maximum: 45mm

Cartridge: Mondo 40K Plus Raised base

Note: Divertor can be adapted to operate at low pressure (min 65kPa)
by request at a small additional charge.

Aquatica Warranty

Aquatica NZ Limited offer the following warranty periods on its range of tapware from the date of purchase.

Residential Use

- Tapware - 5 year warranty
- Handshowers, Shower Roses – 2 year warranty
- Pull-out Sprays and spray heads on Sink Mixer Coils – 2 year warranty
- Commercial tapware – 2 year warranty

Commercial Use

- Tapware - 1 year warranty
- Handshowers, Shower Roses – 1 year warranty
- Pull-out Sprays and spray heads on Sink Mixer Coils – 1 year warranty

Only high quality workmanship and materials have been used in the manufacture of Aquatica's tapware. If any workmanship or material is proven faulty during the warranty period, Aquatica NZ Limited will, at its own cost or option, repair or replace the faulty product.

The warranty is transferable but the original proof of purchase from an authorised Aquatica distributor is required for all claims.

Aquatica's liability will not extend to damage caused by reasonably foreseeable loss such as inappropriate materials in a wet area ie. floating wooden floors.

Waterlines to tapware incorporating a ceramic cartridge or ceramic disc mechanism should have an inline strainer or filter fitted. Absence of these may void the warranty.

Any suspected defect must be notified to Aquatica as soon as possible after discovery. All repair work must be performed by a plumber who has received authorisation from Aquatica prior to proceeding with the work. Aquatica may immediately authorise repair work to be undertaken, however, this is not necessarily acceptance of liability.

Aquatica guarantee that the tapware will be able to handle temperatures up to a maximum of 80°C.

Water pressure up to 1000 kPa is the maximum limit for the tapware. Above this the warranty will become void.

Serial numbers or tags should not be removed from the products as they are essential in establishing warranty.

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz

or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2016

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

